




UGR < 16

Optional accessory: surface mount kit

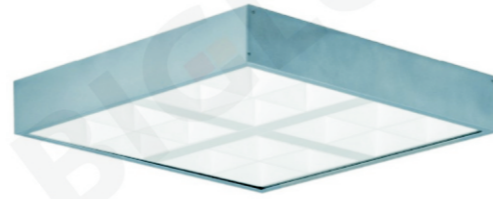

Optional accessory: suspension chain





UGR < 16

### Specifications

Product model	BL-TL40W-01A
Input power	40W
Light output	5,000 lm
Efficacy	125 lm/W
LED lamp	2835
CCT	3000K, 4000K, 5000K, 6000K
CRI	80
Beam angle	86
Optical cover	PC lens
UGR	<16
LED driver	Meanwell
Input voltage	100-277V AC, 50/60Hz
Functions	0-10V, DALI, Emergency, Occupancy sensing
IP Rating	IP20
Lifetime	50,000 hrs


### Dimensions (mm)

40W (595\*595)



### Dimensions (mm)


40W (295\*1195)

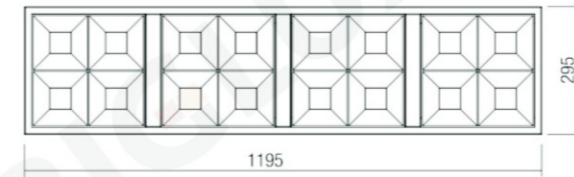

### Specifications

Product model	BL-TL40W-01A1
Input power	40W
Light output	5,000 lm
Efficacy	125 lm/W
LED lamp	2835
CCT	3000K, 4000K, 5000K, 6000K
CRI	80
Beam angle	86
Optical cover	PC lens
UGR	<16
LED driver	Meanwell
Input voltage	100-277V AC, 50/60Hz
Functions	0-10V, DALI, Emergency, Occupancy sensing
IP Rating	IP20
Lifetime	50,000 hrs


### Photometrics

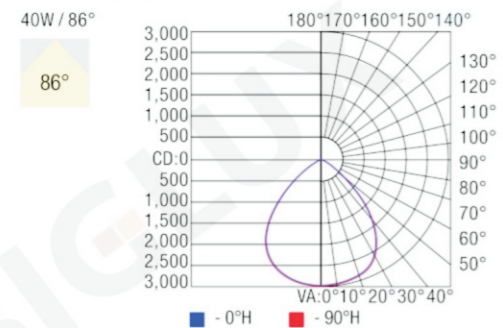

	Center Beam lux	Beam Width
2m	748.44 lux	3.4m 3.5m
3m	332.64 lux	5.2m 5.2m
4m	187.11 lux	6.9m 6.9m
5m	119.75 lux	8.6m 8.6m
6m	83.16 lux	10.3m 10.4m
7m	61.10 lux	12.1m 12.1m

Vertical: 81.5° Horizontal: 81.7°

### Photometrics

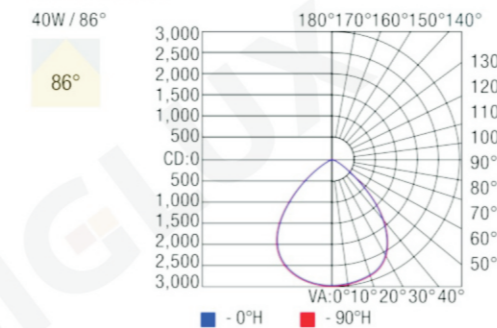

	Center Beam lux	Beam Width
2m	748.44 lux	3.4m 3.5m
3m	332.64 lux	5.2m 5.2m
4m	187.11 lux	6.9m 6.9m
5m	119.75 lux	8.6m 8.6m
6m	83.16 lux	10.3m 10.4m
7m	61.10 lux	12.1m 12.1m

Vertical: 81.5° Horizontal: 81.7°